



Beam Clamp
015-798


- Used for attaching chains or lines to beams for dead hanging or guide wires.
- Includes two $\frac{3}{8}$ " x 1" (9.5 mm x 25.4 mm) Grade 5 hex bolts with lock nuts, and a $\frac{1}{4}$ " (6.35 mm) round pin anchor shackle.

Ordering Information


Product Code	Description	RWL	Wt.
015-698	$\frac{3}{8}$ " (9.5 mm) Throat, will grip flanges from 4" to 8" (102 mm to 203 mm)	350 lbs. 159 kg	2 lbs. 0.9 kg
015-798	$\frac{3}{4}$ " (19 mm) Throat, will grip flanges from 4 $\frac{3}{4}$ " to 8 $\frac{1}{2}$ " (121 mm to 216 mm)	350 lbs. 159 kg	2 lbs. 0.9 kg

RWL: RWL is maximum load that can be applied to the beam clamp which is in "like new" condition and has been properly installed, maintained, and operated.

Dimensions

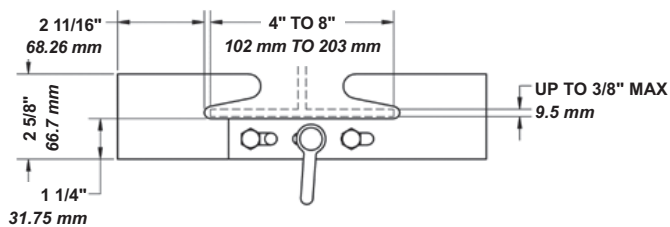

#015-698 BEAM CLAMP

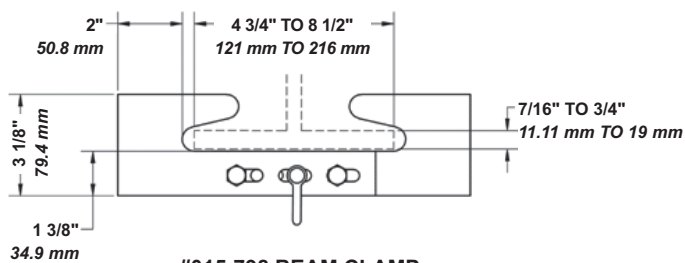

#015-798 BEAM CLAMP