




AlphaChain
022-250TC

AlphaChain

- 7 mm (0.275") black alloy chain for rigging.
- Black chain eliminates glare and reflection.
- Grade 63 hardened alloy chain meeting OSHA requirements for sling usage OSHA 1910.184(e)(5).
- Used with standard 1/4" (6.35 mm) hardware.
- Marked with JRC on every link.
- Date code on every 10th link for traceability.
- 3,250 lb. (1,474 kg) working loading limit based on the manufacturer's 4:1 safety factor.

Trim Chain

- Most popular and economical lift line termination.
- 36" (914 mm) long, 7 mm (0.275") Grade 63 alloy chain, with a forged round pin anchor shackle, and thimble.
- The chain is wrapped one and one half turns around the batten and attached back to the thimble at the end of the lift line with a forged shackle. Adjustment is made by connecting the shackle into a link along the return side of the chain.

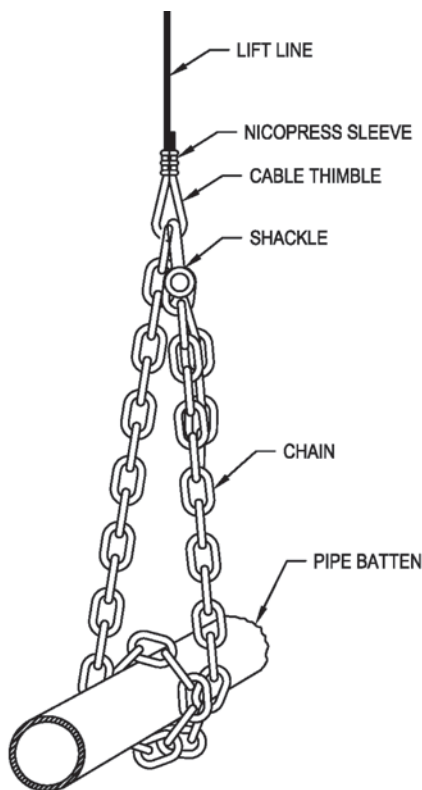


Trim Chain
015-1192B

Ordering Information

Product Code	Description	RWL	Wt.
022-250TC	AlphaChain 7 mm (0.275") Grade 63 Alloy Chain	3250 lbs. 1474 kg	0.7 lb. 0.32 kg
015-1191B	Black Trim Chain with 5/16" (7.9 mm) Shackle, 1/4" (6.35 mm) Thimble	3250 lbs. 1474 kg	2 lbs. 0.9 kg
015-1192B	Black Trim Chain with 1/4" (6.35 mm) Shackle, 1/4" (6.35 mm) Thimble	3250 lbs. 1474 kg	2 lbs. 0.9 kg
015-1193B	Black Trim Chain with 1/4" (6.35 mm) Shackle, 3/16" (4.76 mm) Thimble	3250 lbs. 1474 kg	2 lbs. 0.9 kg

RWL: RWL is maximum load that can be applied to the trim chain which is in "like new" condition and has been properly installed, maintained, and operated.

Dimensions

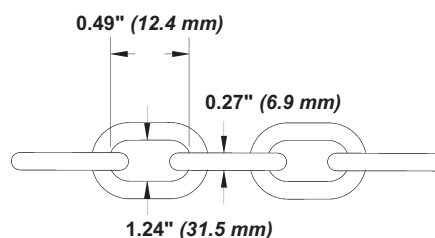

#022-250TC