



Chain
022-250

Grade 30 Chain

- Grade 30 Proof coil chain for dead hanging.
- Zinc plated.
- Manufactured to Federal Specification RRC-271-E.
- Working loading limit based on the manufacturer’s 4:1 safety factor.


Grade 30 Trim Chain

- Most popular and economical lift line termination.
- 36" (914 mm) long, 1/4" (6.35 mm) Grade 30 proof coil chain, with a forged round pin anchor shackle, and thimble.
- The chain is wrapped one and one half turns around the batten and attached back to the thimble at the end of the lift line with a forged shackle. Adjustment is made by connecting the shackle into a link along the return side of the chain.

Ordering Information


Product Code	Description	RWL	Wt.
022-250	1/4" (6.35 mm) Proof Coil Chain	1250 lbs. 567 kg	0.7 lb./ft. 0.32 kg/m
022-375	3/8" (9.5 mm) Proof Coil Chain	2650 lbs. 1202 kg	1.5 lbs./ft. 0.68 kg/m
015-1191	Trim Chain with 5/16" (7.9 mm) Shackle, 1/4" Thimble (6.35 mm)	750 lbs. 340 kg	2 lbs. 0.9 kg
015-1192	Trim Chain with 1/4" (6.35 mm) Shackle, 1/4" Thimble (6.35 mm)	750 lbs. 340 kg	2 lbs. 0.9 kg
015-1193	Trim Chain with 1/4" (6.35 mm) Shackle, 3/16" Thimble (4.76 mm)	750 lbs. 340 kg	2 lbs. 0.9 kg

RWL: RWL is maximum load that can be applied to the trim chain which is in "like new" condition and has been properly installed, maintained, and operated.

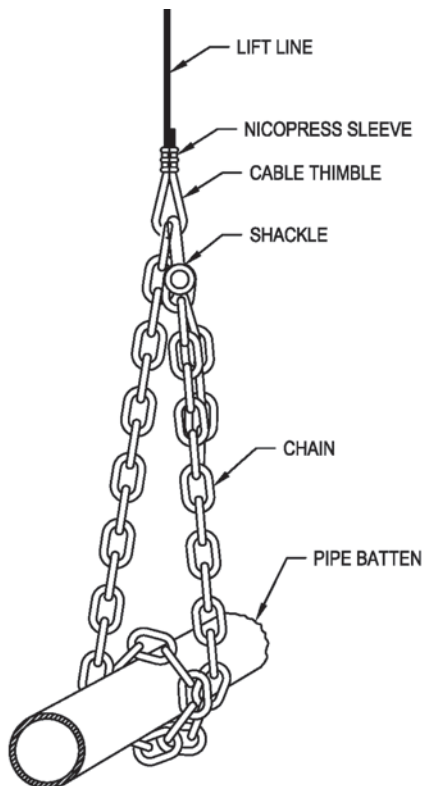


Trim Chain
015-1192

Dimensions

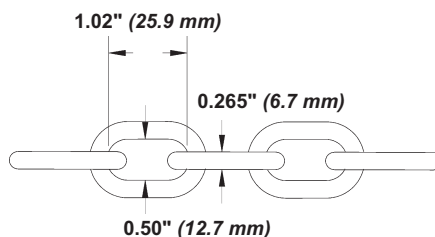

#022-250

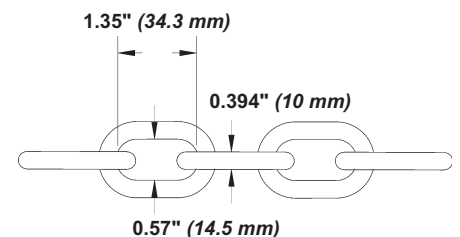

#022-375